

# Segmented branch for the smoke extraction system

## ILSL-SMO



### Description

ILSSL-SMO segmented branch with male end, fire resistance class: E<sub>600</sub> 120 (h<sub>o</sub>) S1500 single, designed for single-compartment smoke extraction systems and combined (dual-function) systems. It is equipped with GASK double lip seals for ventilation fittings made of EPDM rubber and a 1.8 mm thick and 10 mm wide intumescent seal. Welding points and other joints are covered with high-temperature sealant, which should be also used for sealing the connection of ILSSL-SMO with another duct. SMOKE System fittings are available in diameters from 100 to 1000 mm.


Order example: ILSSL-SMO-300

#### Product code example

Product code: **ILSSL-SMO** - aaa

type \_\_\_\_\_  
 Ød \_\_\_\_\_

### Dimensions

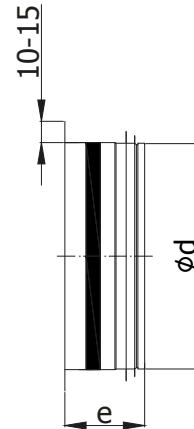

Ød [mm]	Weight [kg]
100	0,13
125	0,17
140	0,19
150	0,20
160	0,21
180	0,24
200	0,27
224	0,30
250	0,33
280	0,37
300	0,40
315	0,42
355	0,47
400	0,53
450	0,76
500	0,84
560	0,94
600	1,01
630	1,06
710	1,56
800	2,26
900	2,54
1000	3,01