

Roof cowl with mesh

CD-O-P / CD-S-P / CD-P-P



Description

CD-S-P / CD-O-P / CD-P-P Supply air roof cowl is designed to be placed on roof of residential buildings. The roof cowl has aesthetic design made of perforated metal sheet (square holes) and 3 types of top hats - pitched, round and flat. The mesh ensures proper airflow and simultaneously prevents birds, leaves and others from entering into the duct termination point. CD-S-P / CD-O-P / CD-P-P Supply air roof cowl has few types of connection fitted for different duct terminations.

Available versions:



CD-S-P - pitched hat



CD-O-P - round hat



CD-P-P - flat hat

Connection method — Product code examples


- CD-...-P-...-MSF - female connector for fittings
- CD-...-P-...-NS - male connector
- CD-...-P-...-NSL - male connector with a gasket (cannot be powder coated)
- CD-...-P-...-MSFF - extended female connector - slid over the duct

Available materials — Product code examples


- CD-...-P-...-... - galvanised steel sheet
- CD-...-P-...-...-RAL - galvanised sheet powder-coated in any colour from the RAL palette (except NSL version with a seal)

Product code example


Product code: **CD-S-P - 160 - NSL - RAL**




Wymiary

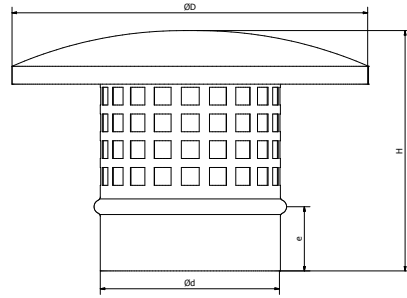

CD-O-P			
Ød [mm]	ØD [mm]	H [mm]	e [mm]
100	200	165	36
125	224	170	36
160	250	200	36

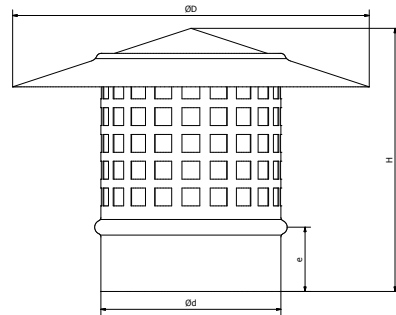

CD-S-P			
Ød [mm]	ØD [mm]	H [mm]	e [mm]
100	200	165	36
125	224	170	36
160	250	200	36

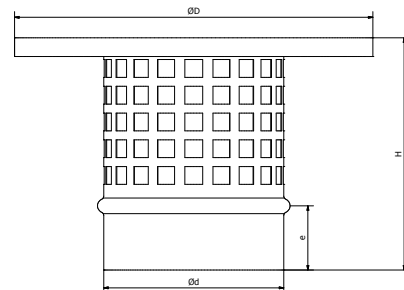

CD-P-P			
Ød [mm]	ØD [mm]	H [mm]	e [mm]
100	200	145	36
125	250	150	36
160	250	180	36