

F..-BPL



Description

Pressed ventilation bends insulated with rubber foam, applied for installations running at places where their further insulation is impossible. They are perfectly fit for the duct air-conditioning system where the use of the 9-25 mm insulation is possible.

The bends are available with standard 90- and 45- degree angles and in the short version as F..-BPKL-...-..., or in the short female end version as F..-BPKFL-...-..., which enters into the spiral duct on one side and overlaps the frame of e.g. KN-RM-ddd valve on the other side.

Marking example

Product code: **F09 - BPL - - 100 - 90**

rubber thickness Q:

- 09
- 13
- 19
- 25

type

standard $r=1D$

short $r=0.8D$


short female-male

sheet:


- galvanised
- stainless steel
- aluminium

diameter

angle

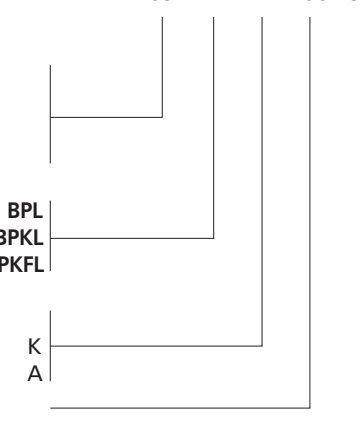


Dimensions

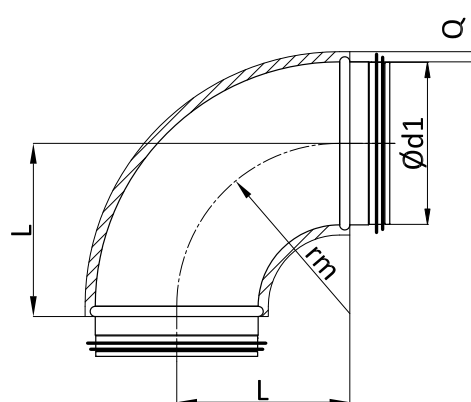

$\varnothing d_{1, nom}$ [mm]	F..-BPL L [mm]	F..-BPKL / F..BPKFL L [mm]
80	100	52
100	100	62
125	125	75
150	150	87
160	160	92
200	200	112
250	250	-

Technical data

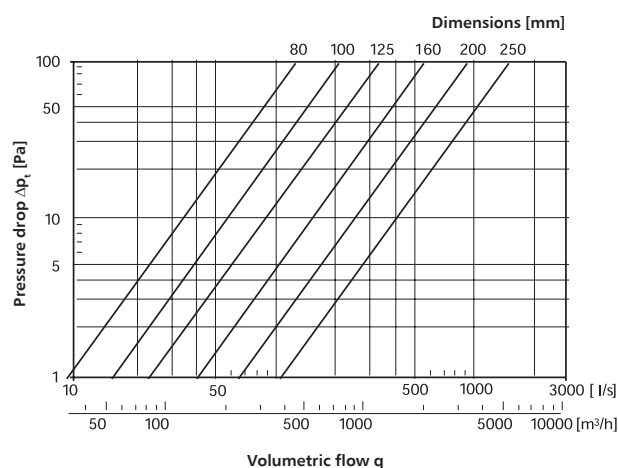

Data for F..BPL