

## Roof flashing for roof penetrations

# PD-EPDM-SO



### Description

The PD-EPDM-SO roof flashing provides a circumferential seal around the ducts outside the building. The pipe flashing is made of EPDM with good resistance to high temperatures, tensile stress and UV radiation. It can be easily fitted into ducts and outlets with various diameters. The outer part of the pipe flashing base is edged with aluminium to facilitate manual fitting the flashing to the roof profile. Each PD-EPDM-SO roof sealing sleeve is available with plastic clips and a zip tie.

**Ozone resistance:** 70 hours at 500 parts per 100 million

**Temperature resistance:** -55°C to +135°C (transient)  
-55°C to +100°C (continuous)


**Maximum tensile strength:** 10MPa

#### Product code examples

Product code: **PD-EPDM-SO - aaa**

type \_\_\_\_\_  
Ød<sub>1</sub> \_\_\_\_\_

### Dimensions-

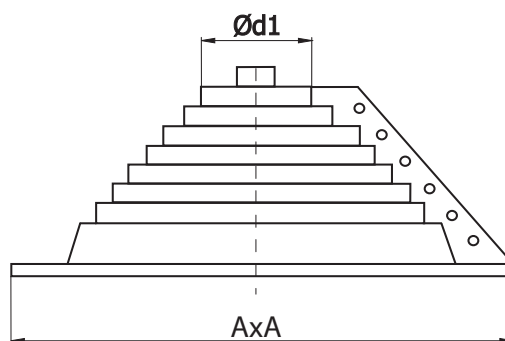

Code	Ød <sub>1</sub> [mm]	AxA [mm]
PD-EPDM-SO-112-224	112-224	362
PD-EPDM-SO-250-400	250-400	546