


Roofwork and acetate sealants

SIL-UNI-OCT-300



Dimensions

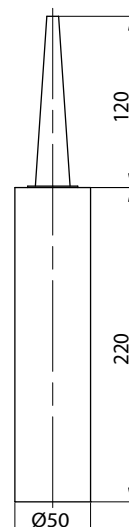

Description

Roofwork sealants are intended for caulking the flashing sheets of roofs, patios, chimneys and all roof penetrations. They are perfect for air- and watertight sealing of corrugated and box profile sheets. Once applied, the sealant retains its flexibility and does not crack when the structural parts expand, contract or shift.

Acetate sealants are single-component flexible caulks based on acetate compounds. They provide durable and flexible sealing layers resistant to weathering.

Product code example

Product code: **SIL-UNI-OCT-300**

type _____

Technical specifications

Product code	Volume	Material	Density	Method of application	Thermal resistance	Colour	Intended use
SIL-UNI-OCT-300	300 ml	acetate silicone compound	1.0 - 1.3 kg/l	PIS-REC	-40°C to +180°C	grey	sealing of hemmed and seamed stainless steel sheets