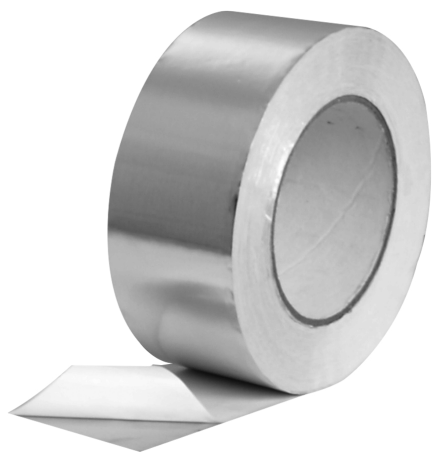


## High-temperature sealing tape for fireplace ductwork

**TALK****Description**


The TALK high-temperature sealing tape is made from a 50-micron thick aluminium foil and acrylic glue of superior tack and permanent bonding strength. The materials used in the product provide temperature resistance up to 350°C. This allows sealing of air heating ductwork of fireplaces and ducted heating units (electric fan coils, hot water coils and gas heaters).

Note: The recommended storage temperature for sealing tapes is +21°C at relative humidity up to 50% to preserve the maximum adhesive performance. Sealing tape should also be protected from direct sunlight.

**Product code example**

Product code: **TALK - 50 - 50**

type \_\_\_\_\_  
width B \_\_\_\_\_  
length \_\_\_\_\_

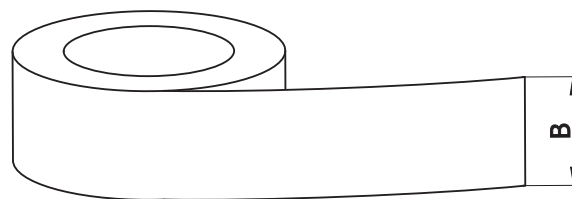**Dimensions**

Product code	width B (mm)	length (m)	package (pcs)	min. temp. (°C)	max. temp. (°C)
TALK-50-50	50	50	24	-30	+350
TALK-75-10	75	10	16	-30	+350

**Technical specifications**

Properties	Unit	Value	Test method
Thickness	microns	50	PSTC-33 / ASTM D3652
Adhesion	N/25 mm	18	PSTC-1 / ASTM D3330
Tack Rolling Ball	cm	20	PSTC-6 / ASTM D3121
Strength	N/25 mm	70	PSTC-31 / ASTM D3759
Stretchability	%	3.5	PSTC-31 / ASTM D3759
Fire resistance	(25 / 50 & Class O)	Passed	UL 723 & BS476 Pt 6 & 7
Temp. resistance	°C	-30 to +350	-
Application temp.	°C	+10 to +40	-